



1.25G 1X9-1000BX-D Transceiver BiDi SC, Tx1550nm DFB / Rx1310nm, SMF 10KM, LVPECL / PECL Signal Detection

Part Number: F1X9-C2-S53-10P-01Z



Overview

F1X9-C2-S53-10P-01Z 1X9 SIP package style transceivers are compliant with the industrial standard specification. The high performance uncooled 1550nm DFB transmitter and high sensitivity PIN receiver provide superior performance for Gigabit Ethernet 1000BASE-BX10 and Fiber Channel 1GFC applications up to SMF 10km optical links.

Applications

- Gigabit Ethernet 1000BASE-BX10 @1.25G
- Fiber Channel 1GFC @1.0625G

Features

- Compliant with IEEE802.3ah 1000BASE-BX10-D
- Compatible with Fiber Channel 100-SM-LL-V
- Industry Standard 1x9 Footprint
- 1550nm DFB transmitter
- Simplex BiDi SC connector
- Single 3.3V or 5V Power Supply
- DC-coupled Differential LVPECL inputs and outputs
- LVPECL / PECL Signal Detection Output
- Wave Solderable and Aqueous Washable
- Link distance 10km over SM fiber
- RoHS Compliant

Laser Safety

- This is a Class 1 Laser Product complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019.
- Caution: Use of control or adjustments or performance of procedure other than those specified herein may result in hazardous radiation exposure.



Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit
Storage Temperature	T _{ST}	-40	+85	°C
Storage Relative Humidity	RH	5	95	%
Supply Voltage (F1X9-C2-S53-10P-01Z)	V _{CC}	0	+4.5	V
Supply Voltage (F1X9-C2-S53-10P5-01Z)	V _{CC}	0	+6.0	V

Recommended Operating Conditions

Parameters	Symbol	Min.	Typ.	Max.	Unit
Case Operating Temp. (F1X9-C2-S53-10P-01Z)	T _{OP}	0	-	+70	°C
Case Operating Temp. (F1X9-C2-S53-10Pi-01Z)	T _{OP}	-40		+85	°C
Supply Voltage (F1X9-C2-S53-10P-01Z)	V _{CC}	+3.13	+3.3	+3.47	V
Supply Voltage (F1X9-C2-S53-10P5-01Z)	V _{CC}	+4.75	+5.0	+5.25	V
Supply Current	I _{CC}			300	mA
Power Consumption	P			1	W
Lead Soldering Limits	T _{sold}			260/10	°C/Sec

Transmitter Electro-optical Characteristics

T_{OP} = 0 °C to 70 °C (F1X9-C2-S53-10P-01Z); T_{OP} = -40 °C to 85 °C (F1X9-C2-S53-10Pi-01Z)

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Data Rate	DR	1.0625	1.25		Mb/s	
Optical Launch Power	P _o	-9		-3	dBm	1
Optical Center Wavelength	λ _c	1500	1550	1600	nm	
Spectral Width (RMS)	Δλ			1	nm	
Optical Extinction Ratio	ER	8.2			dB	
Optical Eye Mask		IEEE802.3ah and ITU-T G.957				
Rise / Fall Time (20~80%)	T _r / T _f			0.26	ns	
Differential Data Input Swing	V _{IN}	300			mV	

Note1: The optical power is launched into a 9/125μm single mode fiber.



Receiver Electro-optical Characteristics


$T_{OP} = 0\text{ }^{\circ}\text{C to }70\text{ }^{\circ}\text{C}$ (F1X9-C2-S53-10P-01Z); $T_{OP} = -40\text{ }^{\circ}\text{C to }85\text{ }^{\circ}\text{C}$ (F1X9-C2-S53-10Pi-01Z)

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Data Rate	DR	1.0625	1.25		Mb/s	
Receiver Sensitivity	SEN			-22	dBm	1
Maximum Receive Power	PRx-MAX	-3			dBm	1
Optical Center Wavelength	λ_c	1260		1360	nm	
Signal Detect Assert	SDA			-22	dBm	
Signal Detect De-Assert	SD _D	-36			dBm	
Signal Detect Hysteresis	SD _{HY}	0.5		5	dB	
Differential Data Output Swing	V _{OUT}	300		2000	mV	
Signal Detect O/P Voltage Low	V _{SDL-VCC}	-1810		-1620	mV	
Signal Detect O/P Voltage High	V _{SDH-VCC}	-1025		-880	mV	

Note1: Measured with a PRBS 2⁷-1 test pattern @1.25Gbps BER<10⁻¹².



Pin Assignment

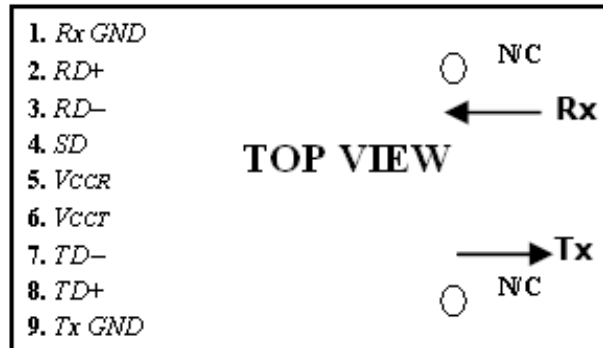


Pin Description

Pin	Name	Function / Description
1	Rx GND	Receiver Signal Ground
2	RD+	Receiver Data Out
3	RD-	Receiver Data Out Bar
4	SD	Signal Detect(1)
5	VccR	Receiver Power Supply
6	VccT	Transmitter Power Supply
7	TD-	Transmitter Data In Bar
8	TD+	Transmitter Data In
9	Tx GND	Transmitter Signal Ground

Note1: Signal Detect is a basic fiber failure indicator. This is a single-ended LVPECL/PECL output. As the input optical power is decreased, Signal Detect will switch from high to low (de-assert point) somewhere between sensitivity and the no light input level. As the input optical power is increased from very low levels, Signal Detect will switch back from low to high (assert point).



Mechanical Dimensions

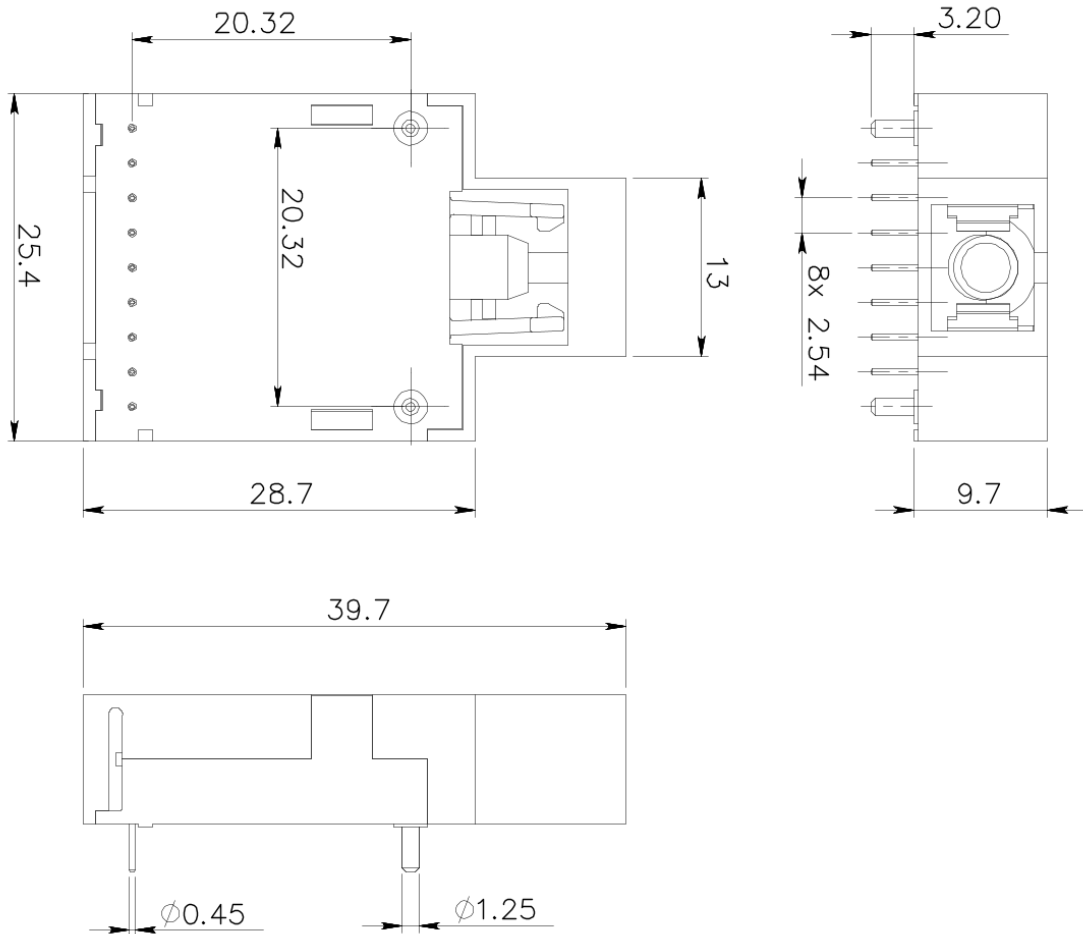

(All Dimensions are ± 0.20 mm Unless Otherwise Specified, Unit: mm)

Ordering Information

Part No.	Tx	Rx	Conn.	I/O	SD	Link	Voltage	Temp.
F1X9-C2-S53-10P-01Z	1550nm	1260nm ~ 1360nm	BiDi SC	DC/DC	LVPECL	SMF 10km	3.3V	0~70°C
F1X9-C2-S53-10Pi-01Z					LVPECL		3.3V	-40~85°C
F1X9-C2-S53-10P5-01Z					PECL		5V	0~70°C
F1X9-C2-S53-10P5i-01Z					PECL		5V	-40~85°C

Note: Distances are indicative only. To calculate a more precise link budget based on specific conditions in your application, please refer to the optical characteristics.